


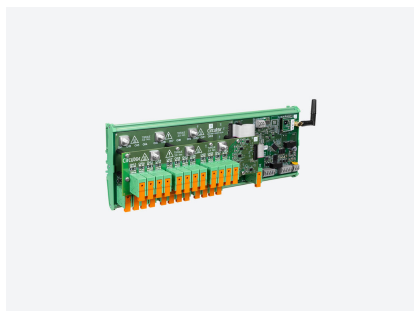

STM-S-24-F915

STM-S-24-F915, Equip mesura shunt, 24 entrades, comunicacions LoRa freqüència 915 MHz

Code: E85SE4. **DESCATALOGADO**

- > Comunicacions: LoRa-915 MHz.
- > Entrades digitals: 3
- > Mesura: 30 A
- > Alimentació Vca: 24 Vcc
- > Fixació: Carril DIN

Aplicació

Supervisió de strings fotovoltaics en horts solars i en instal·lacions d'autoconsum.



STM-S-24-F915

Analitzador per a strings Fotovoltaics

Code: E85SE4.

Especificacions

DC power supply

Installation category	CAT II 1500 V
Consumption	3.6 W
Nominal voltage	24 V $\pm 10\%$

Mechanical characteristics

Size (mm) width x height x depth	362 x 114 x 94,5 (mm)
Envelope	Self-extinguishing V0 plastic
Fastening	DIN rail
Weight (kg)	0,835

Environmental characteristics

Protection class	IP 00
Relative humidity (without condensation)	5 ... 95 %
Installation, location, position.	3000 m
Storage temperature	-25...+80 °C
Operating temperature	-25...+70 °C

Current measurement circuit

Installation category	CAT II 1500 V
Consumption	1 Channel: 1.0125 W
Impedance	0.5 m Ω
Phase current measuring range	0.1 ... 30 A DC
Minimum current measurement	0.1 A

Voltage measurement circuit

Installation category	CAT II 1500 V
Input impedance	2400 k Ω
Voltage measuring range	-25 ... -1500 Vdc
Maximum input voltage consumption	0,625 mA
Minimum measurement voltage (Vstart)	-25 V

Input

Accuracy	$\pm 3^\circ\text{C}$
Range	-30 ... 100°C
Resolution	$\pm 0,1$ mA
Type	Pt100/1000



STM-S-24-F915

Analitzador per a strings Fotovoltaics

Code: E85SE4.

Standards

Electrical safety, Maximum height (m)	3000
Electrical safety, Installation category	Protection against electric shock: Double class II insulation
Standards	EN 61000-6-2, EN 61000-6-4, EN 61010-1, EN 61010-2-30

User interface

LED	4
-----	---

Digital inputs


Input/output insulation	Optoïllat
Quantity	3
Type	Contacte lliure de potencial
Maximum short-circuit current	3.2 mA
Maximum open circuit voltage	24 V

STM-S

Mòdul de control per a mesurament FV mitjançant shunt

CODI	TIPUS	Comunicacions	Rang mesura (A)	Alimentació Vcc
E85SC1.	STM-S-12-485	RS-485	45	24 Vcc
E85SC3.	STM-S-12-F868	LoRa-868 MHz.	45	24 Vcc
E85SC4.	STM-S-12-F915	LoRa-915 MHz.	45	24 Vcc
E85SE1.	STM-S-24-485	RS-485	30	24 Vcc
E85SE3.	STM-S-24-F868	LoRa-868 MHz.	30	24 Vcc
E85SE4.	STM-S-24-F915	LoRa-915 MHz.	30	24 Vcc

The minimum configuration of the STM solution is made up of an STM-C module and an STM-S module




STM-S-24-F915

Analitzador per a strings Fotovoltaics



Code: E85SE4.

Dimensions

STM-S24-FXXX



STM-S12-FXXX

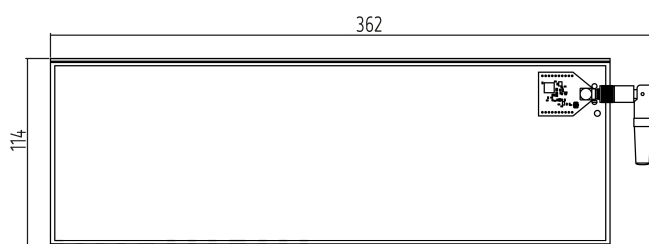

Conexions

