



EMSC45 300mA

EMSC45 300mA, Miliamperímetre per a mesura en corrent altern, ferro mòbil, carril DIN

Code: M10165. DESCATALOGADO

- > Escala: 90°, P2
- > Precisió: 1,5
- > Rang mesura (A): 0,3

Descripció

- No necessiten alimentació auxiliar
- Classe de precisió 1,5
- Mesura en veritable valor eficaç de 100 mA ... 600 mA
- Escales intercanvials

Aplicació

En aplicacions de corrent altern per controlar l'estat del corrent de manera molt ràpida i visual.



EMSC45 300mA

Amperímetres de ferro mòbil (CA)

Code: M10165.

Especificacions

Mechanical characteristics

Size (mm) width x height x depth	85 x 52 x 65 (mm)
Weight (kg)	0,142

Environmental characteristics

Protection class	Carril DIN: IP 52 (frontal), IP 00 (Terminals)
Storage temperature	-25...+40 °C
Operating temperature	+10 ... +30 °C

Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

Current measurement circuit

Consumption	0,3 ... 1,5 VA
Sampling frequency	20...100 Hz
Allowable overload	1,2 In permanent / 5 In durant 30s / 10 In durant 5s / 40 In durant 1s

Electrical characteristics

Insulation voltage, circuit	2 KV, 50 HZ <1 min entre mecanismo y caja
-----------------------------	---

Measurement accuracy

Accuracy	1,5 % FE
----------	----------

EMSC-mA

Mil·liamperímetre per a mesurament en corrent altern

CODI	TIPUS	Escala	Precisió	Rang mesura (A)
M10151.	EM45 100mA	90°, P2	1,5	0,1
M10161.	EMSC45 100mA	90°, P2	1,5	0,1
M10152.	EM45 150mA	90°, P2	1,5	0,15
M10162.	EMSC45 150mA	90°, P2	1,5	0,15
M10154.	EM45 250mA	90°, P2	1,5	0,25
M10164.	EMSC45 250mA	90°, P2	1,5	0,25
M10155.	EM45 300mA	90°, P2	1,5	0,3
M10165.	EMSC45 300mA	90°, P2	1,5	0,3
M10156.	EM45 400mA	90°, P2	1,5	0,4



EMSC45 300mA

Amperímetres de ferro mòbil (CA)

Code: M10165.

CODI	TIPUS	Escala	Precisió	Rang mesura (A)
M10166.	EMSC45 400mA	90°, P2	1,5	0,4
M10157.	EM45 500mA	90°, P2	1,5	0,5
M10167.	EMSC45 500mA	90°, P2	1,5	0,5
M10158.	EM45 600mA	90°, P2	1,5	0,6
M10168.	EMSC45 600mA	90°, P2	1,5	0,6




EMSC45 300mA

Amperímetres de ferro mòbil (CA)

Code: M10165.

Dimensions

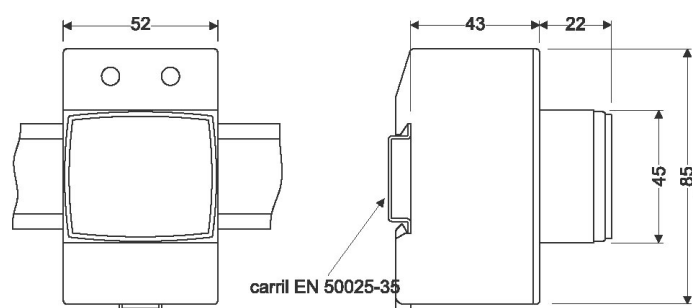

Conexions

