



## Bridge LR 2

Bridge LR PSAC, LoRa™ Private (P2P) to Modbus RTU network conversion gateway, AC powered.,

Code: D80112.

### Specifications

#### AC power supply

Installation category	CAT III 300 V
Consumption	2,5 ... 4,5 VA
Frequency	50 ... 60 Hz
Nominal voltage	100 ... 240 V ~

#### Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5 ... 95 %
Operating temperature	-10 ... +60 °C

#### Mechanical characteristics

Envelope	Plastic UL 94 - V0 self-extinguishing
Fastening	DIN rail
Weight (kg)	0,08

#### Communication Network

Protocol	Modbus RTU LoRa Private (P2P)
----------	-------------------------------

#### Standards

Electrical safety, Maximum height (m)	2000
Standards	UNE-EN 61000-6-2; UNE-EN 61000-6-3; UNE-EN 301489-1; UNE-EN 301489-17; UNE-EN IEC 62368-1

#### Electrical safety

Insulation	Double-insulated electric shock protection class II (IEC 61010-1)
------------	---

#### User interface

LED	3 LED
-----	-------

#### Radio communication

Band	Banda ISM de 868 Mhz (9 canales)
------	----------------------------------

#### Serial communication

Technology / Type	RS-485
-------------------	--------

#### Bridge LR 2



## Bridge LR 2

Bridge LR, LoRa™ Private (P2P) network conversion gateway to Modbus RTU

Code: D80112.

LoRa™ / RS-485 Converter (Modbus/RTU)

CODE	TYPE	Description
<b>LoRa</b>		
D80112.	Bridge LR 2	LoRa to RS-485 Converter (Modbus/RTU) . AC power supply (110...264 Vac)
D80113.	Bridge LR 2 Pro	LoRa to RS-485 Converter (Modbus/RTU) . DC power supply (9 ... 36 Vdc)




## Bridge LR 2

Bridge LR, LoRa™ Private (P2P) network conversion gateway to Modbus RTU

Code: D80112.

### Dimensions

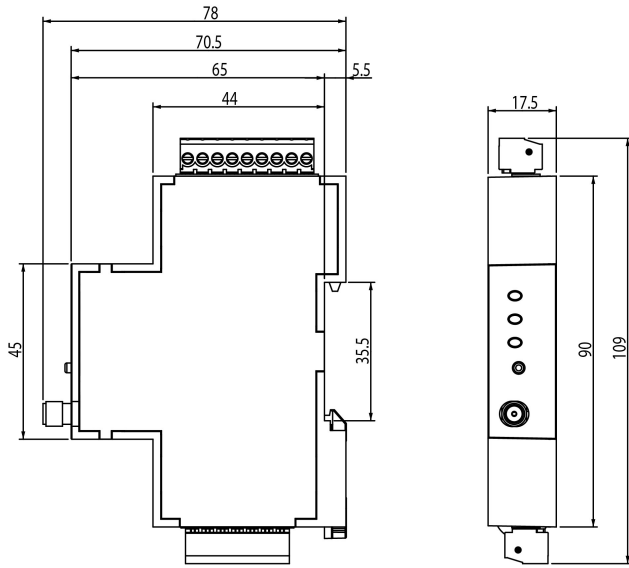

### Connections

