

STM-CH-LoRa-F868

STM-CH-LoRa-F868, LoRa control module with Hall effect transformers for measuring current, 868 MHz frequency,

Code: E82CH20010000 **DESCATALOGADO**

Specifications

DC power supply

Installation category	CAT III 1000 V
Consumption	4.2 W
Nominal voltage	24 V ±10%

Mechanical characteristics

Size (mm) width x height x depth	100 x 127.8 x 72.35 (mm)
Envelope	Self-extinguishing V0 plastic
Fastening	DIN rail
Weight (kg)	0,19

Environmental characteristics

Protection class	IP 00
Relative humidity (without condensation)	95%
Installation, location, position.	2000 m
Storage temperature	20...80 °C
Operating temperature	-20...70 °C

Current measurement circuit

Start-up current (Ist)	2 A
Installation category	CAT II 1000 V
Impedance	300 kΩ
Phase current measuring range	25 A channel, 2 ... 25 Adc 50 A channel, 2 ... 50 Adc 200 A channel, 2 ...100 Adc

Voltage measurement circuit

Installation category	CAT III 1000 V
Input impedance	3200 kΩ
Voltage measuring range	10...1500 Vdc
Maximum input voltage consumption	0,5 mA
Minimum measurement voltage (Vstart)	10 V

Input

Accuracy	± 3°C
Range	-25 ... 100°C
Resolution	±0,1 mA
Type	Pt100/1000



STM-CH-LoRa-F868

Code: E82CH20010000

Standards

Electrical safety, Installation category	Protection against electric shock: Double class II insulation
Standards	EN 61000-6-2, EN 61000-6-4, EN 61010-1, EN 61010-2-30

User interface

LED	7

Analogue inputs

Input impedance	150 Ω
Nominal range	0...20 mA / 4...20 mA
Nominal input range	0...20 mA / 4...20 mA
Measurement type	Current
Maximum allowable neutral current	20 mA
Accuracy	± 0,1 mA

Digital inputs

Input/output insulation	Optoisolated
Quantity	4
Type	Potential free contact
Maximum short-circuit current	6 mA
Maximum open circuit voltage	24 V

STM-HALL
Control module for PV measurement using Hall effect sensor

CODE	TYPE	Description
Control module		
E82CH1.	STM-CH-485	RS-485 control module for measuring currents using Hall effect transformers
E82CH20010000	STM-CH-LoRa-F868	LoRa control module with Hall effect transformers for measuring current, 868 MHz frequency
E82CH20020000	STM-CH-LoRa-F915	LoRa control module with Hall effect transformers for measuring current, 915 MHz frequency
Current measurement module		
E82SH0.	STM-SH	Slave module for measuring up to 16 current channels with Hall effect transformers
E823H0.	M/STM-25x2	STM-H 25A tray with 2 transformers
E824H0.	M/STM-50x2	STM-H 50A tray with 2 transformers
E821H0.	M/STM-25x4	STM-H 25A tray with 4 transformers
E822H0.	M/STM-50x4	STM-H 50A tray with 4 transformers

The minimum configuration of the STM solution is made up of an STM-CH module and an STM-SH module


Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.




STM-CH-LoRa-F868

Code: E82CH20010000

Dimensions

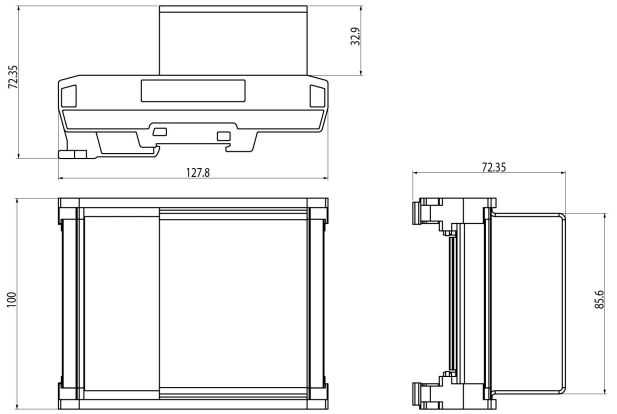

Connections

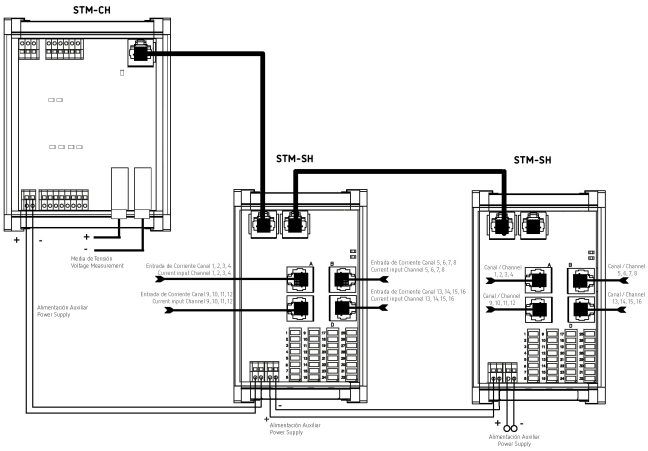

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.