



## CC-D Out1

CC-D Out1, Transducer Adc

Code: M25161.

- > Output type: 1, 3
- > Analog output: 0...20mA
- > Measure: 20 mA
- > Paramètre: A dc

## Description

The **CV-D** transducers, convert D.C voltage to D.C process indicator signal, and it can be used for galvanic separation between the input and output circuits.

The analog output is directly proportional to the input signal.



## CC-D Out1

DC Voltage transducer

Code: M25161.

### Specifications

#### AC power supply

|                 |                                  |
|-----------------|----------------------------------|
| Consumption     | 2,5 VA                           |
| Frequency       | 40...90 Hz                       |
| Nominal voltage | 24/115/230/400 Vca (-15...+20 %) |

#### Mechanical characteristics

|                                  |                    |
|----------------------------------|--------------------|
| Size (mm) width x height x depth | 45 x 75 x 110 (mm) |
| Weight (kg)                      | 0,29               |

#### Environmental characteristics

|                       |                                |
|-----------------------|--------------------------------|
| Protection class      | IP 20 (Terminals) IP 40 (case) |
| Storage temperature   | -40...+70 °C                   |
| Operating temperature | -10...+55 °C                   |

#### Current measurement circuit

|                           |                    |
|---------------------------|--------------------|
| Nominal current (In)      | 500 µA...10 A      |
| Phase current measurement | 0...120 % In       |
| Allowable overload        | 300 % In permanent |

#### Standards

|                                       |   |
|---------------------------------------|---|
| Electrical safety, Maximum height (m) | 2000  |
| Standards                             | IEC 529, IEC 688, IEC 801, EN 50081-2, EN 50082-2, IEC 1010 |

#### Analogue inputs

|                              |                        |
|------------------------------|------------------------|
| Load impedance in current    | < 500 Ω                |
| Ripple (effective RMS value) | < 0,5 %                |
| Load impedance in voltage    | > 500 Ω                |
| Response time                | < 300 ms (0...99 % Vn) |

#### Analogue outputs

|                                    |                                  |
|------------------------------------|----------------------------------|
| Current mode, nominal range        | 0...10, 20 mAac                  |
| Displaced output                   | 0,2...2 V / 2...10 V / 4...20 mA |
| Voltage mode: nominal output range | 0...5, 10 Vac                    |

#### Measurement accuracy

|                           |          |
|---------------------------|----------|
| Phase current measurement | 0,2 % FS |
|---------------------------|----------|

CC-D



## CC-D Out1

DC Voltage transducer

Code: M25161.

DC Current transducer

| CODE   | TYPE      | Output type | Analog output | Measure | Paramètre |
|--|-----------|-------------|---------------|---------|-----------|
| DC Current. Auxiliary supply 230 V, 40...90 Hz, Accuracy: $\pm 0,5$ % reading. |           |             |               |         |           |
| M25161.  | CC-D Out1 | 1, 3        | 0...20mA      | 20 mA   | A dc      |
| M25162.  | CC-D Out2 | 2           | 4...20mA      | 20 mA   | A dc      |

-AP type: Accuracy:  $\pm 0,5$  % reading, 40...90 Hz. External auxiliary supply not required. Specify: Zero value, full scale and output type.

For other values, see coding table on following pages




# CC-D Out1

DC Voltage transducer

Code: M25161.

## Dimensions

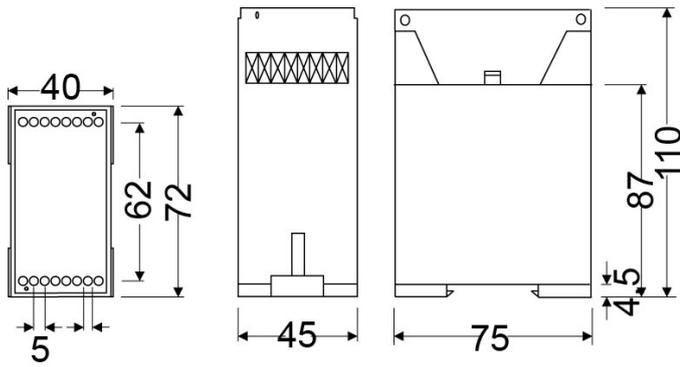

## Connections

