



## EZC96 250V

EZC96 250V, Voltímetre per a mesura en alterna 240°, ferro mòbil, panell 96x96

Code: M11135.    **DESCATALOGADO**

- > Escala: 240°, P1
- > Precisió: 5
- > Rang mesura (V): 250
- > Equip: EZC96
- > Mòduls: 96x96

### Especificacions

#### Mechanical characteristics

|                                  |                     |
|----------------------------------|---------------------|
| Size (mm) width x height x depth | 96 x 96 x 49.2 (mm) |
| Fastening                        | Panell              |
| Weight (kg)                      | 0,22                |

#### Environmental characteristics

|                       |                                            |
|-----------------------|--------------------------------------------|
| Protection class      | Panell: IP 52 (Frontal), IP 00 (Terminals) |
| Storage temperature   | -25...+40 °C                               |
| Operating temperature | +10 ... +30 °C                             |

#### Standards

|                                       |                                                            |
|---------------------------------------|------------------------------------------------------------|
| Certifications                        | CE                                                         |
| Electrical safety, Maximum height (m) | 2000                                                       |
| Standards                             | BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318 |

#### Voltage measurement circuit

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| Consumption                           | 1 ... 4 VA                        |
| Sampling frequency                    | 20 ... 100 Hz                     |
| Maximum permanent measurement voltage | 1,5 Vn permanent / 2 Vn durant 5s |

#### Electrical characteristics

|                             |                                           |
|-----------------------------|-------------------------------------------|
| Insulation voltage, circuit | 2 kV, 50 Hz, 1 min entre mecanismo y caja |
|-----------------------------|-------------------------------------------|

#### Measurement accuracy

|          |        |
|----------|--------|
| Accuracy | 5 % FE |
|----------|--------|

#### EZC-V

Voltímetres per a mesurament en altern 240°, ferro mòbil

| CODI    | TIPUS      | Escala   | Precisió | Mòduls | Equip |
|---------|------------|----------|----------|--------|-------|
| M11125. | EZC72 250V | 240°, P1 | 5        | 72x72  | EZC72 |
| M11128. | EZC72 500V | 240°, P1 | 5        | 72x72  | EZC72 |
| M11135. | EZC96 250V | 240°, P1 | 5        | 96x96  | EZC96 |



# EZC96 250V

Code: M11135.


| CODI    | TIPUS      | Escala   | Precisió | Mòduls | Equip |
|---------|------------|----------|----------|--------|-------|
| M11138. | EZC96 500V | 240°, P1 | 5        | 96x96  | EZC96 |



## EZC96 250V

Code: M11135.

## Dimensions

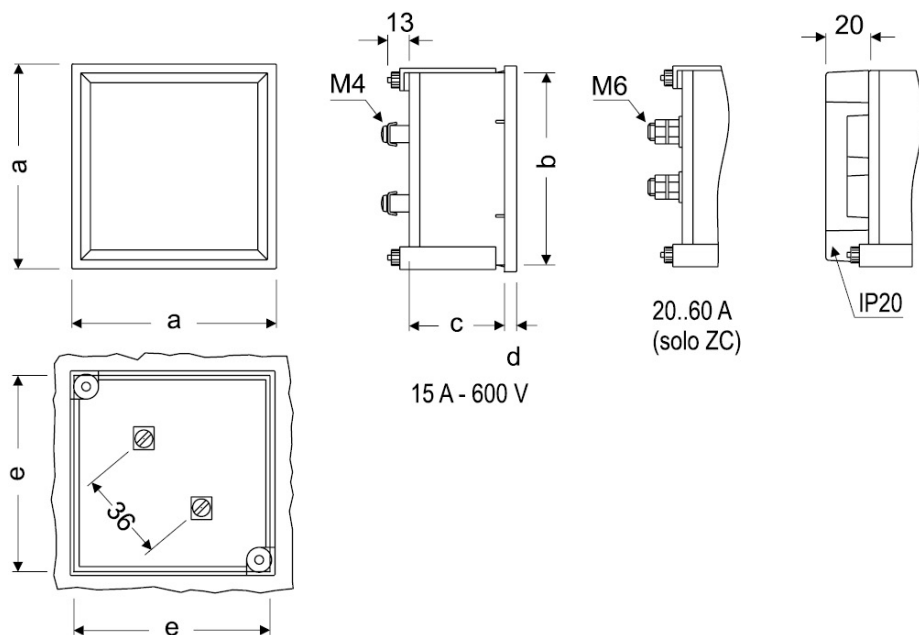

| Type | Fig. ZC | Fig. EZC | a   | b    | c    | d   | e   |
|------|---------|----------|-----|------|------|-----|-----|
| 48   | 1       | -        | 48  | 44,7 | 61   | 5,2 | 45  |
| 72   | 1       | 1        | 72  | 67,2 | 43,5 | 5,7 | 68  |
| 96   | 1       | 1        | 96  | 91   | 43,5 | 5,7 | 92  |
| 144  | 1       | -        | 144 | 137  | 64,5 | 7,3 | 138 |