



BMSC45 60V

BMSC45 60V, Voltímetre per a mesura en continua, bobina mòbil, carril DIN

Code: M11766. **DESCATALOGADO**

- > Escala: 90°, P1
- > Precisió: 1,5
- > Rang mesura (V): 60
- > Equip: BMSC45

Descripció

- No necessiten alimentació auxiliar
- Classe de precisió 1,5
- Mesura a C.C. De 25 A ... 60 A, o ... 60 mV
- Escales intercanvials

Aplicació

En aplicacions de corrent continu per controlar l'estat del corrent de manera molt ràpida i visual.



BMSC45 60V

Voltímetres de bobina mòbil

Code: M11766.

Especificacions

Mechanical characteristics

Size (mm) width x height x depth	85 x 65 x 52 (mm)
Fastening	Carril DIN
Weight (kg)	0,11

Environmental characteristics

Protection class	Carril DIN: IP 52 (frontal), IP 00 (Terminals)
Storage temperature	-25...+40 °C
Operating temperature	+10 ... +30 °C

Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

Voltage measurement circuit

Consumption	1000 Ω/V
Sampling frequency	20...100 Hz
Maximum permanent measurement voltage	1,2 Vn / 2 Vn permanent 5s

Electrical characteristics

Insulation voltage, circuit	2 kV a 50Hz < 1 min entre mecanismo y caja
-----------------------------	--

Measurement accuracy

Accuracy	1,5 % FE
----------	----------

BMSC-V

Voltímetres per a mesurament en continu

CODI	TIPUS	Escala	Precisió	Equip
M11754.	BM45 15V	90° , P1	1,5	BM45
M11764.	BMSC45 15V	90° , P1	1,5	BMSC45
M11755.	BM45 30V	90° , P1	1,5	BM45
M11765.	BMSC45 30V	90° , P1	1,5	BMSC45
M11756.	BM45 60V	90° , P1	1,5	BM45
M11766.	BMSC45 60V	90° , P1	1,5	BMSC45
M11757.	BM45 100V	90° , P1	1,5	BM45
M11767.	BMSC45 100V	90° , P1	1,5	BMSC45



BMSC45 60V

Voltímetres de bobina mòbil

Code: M11766.

CODI	TIPUS	Escala	Precisió	Equip
M11758.	BM45 150V	90° , P1	1,5	BM45
M11768.	BMSC45 150V	90° , P1	1,5	BMSC45
M1175F.	BM45 600V	90° , P1	1,5	BM45
M1176F.	BMSC45 600V	90° , P1	1,5	BMSC45




BMSC45 60V

Voltímetres de bobina mòbil

Code: M11766.

Dimensions

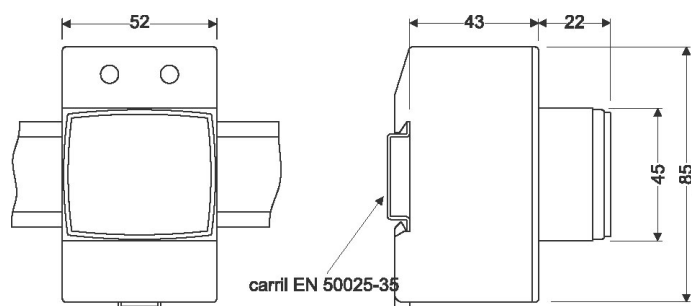

Conexions

