CEM-C21-485-DS-MID

CEM-C21-485-DS-MID, Direct three-phase energy meter with MID certificate

Code: Q22432. **CONSULTAR DISPONIBILIDAD**

> Protocol: Modbus/RTU
> Módules: 4
> Tariff: 2
> Certification: MID
> Communications: RS-485
> Digital inputs: 1
> System: Three-phase
> Measure: Direct
> Measurement Range (V): 3 x 127/220...3 x 230/400
> Measurement Range (A): 5 (65) A
> Max. Current (A): 65

Description

Three-phase electrical energy meter with indirect measurement, 5(10)A (, CEM-C31), direct measurement 65 A (CEM-C21) or single-phase energy meter (CEM-C10).
Built-in LCD display (7 digits) with rotating screen system. It can have integrated RS-485 communications, depending on the model.. Also features
2 buttons (1 sealable button) for viewing all the measured information.
Other features include:

- MID certification, module B+D (depending on the type)
- Class 1 active energy (Class B, in accordance with MID), Class 2 reactive energy
- Complies with the EN 50470 (MID European standards) or IEC 62052-11 standards (international standards), depending on the type.
- Compact size (CEM-C10: 2 modules, 36 mm, CEM-C21 y CEM-C31: 4 modules, 72 mm)
- Resettable partial meter
- 1 programmable impulse output, in accordance with DIN 43864 (CEM-C10, CEM-C31-T1, CEM-C21-T1 models)
- 1 Digital input for Tariff selection and impulse count (CEM-C31-D, CEM-C21-DS)
- Indicates bad connections on the screen
- Energy storage, even in the case of bad connections

Application

- Redundant meter for verifying the energy allocated by the energy provider.
- Energy consumption report sent to a remote system (PLC/BMS).
- Cost control for achieving a high consumption/unit ratio in industrial processes.
- Display of electrical parameters (V, A, kW, kW·h, PF, etc.), per phase and three-phase.

CEM-C21-485-DS-MID

Energy meter for DIN rail mounting

Code: Q22432.

Specifications

AC power supply

Installation category	CAT III 300 V
Consumption	< 2 W, 10 VA
Frequency	50 ... 60 Hz
Nominal voltage	230 V / 400 V ~ (± 20 %)

Mechanical characteristics

Size (mm) width x height x depth	70 x 90 x 64 (mm)
Weight (kg)	0,356

Environmental characteristics

Relative humidity (without condensation)	5 ... 95 %

Current measurement circuit

Consumption	0.3 VA ... 10 A
Reference current (Iref)	5 A
Maximum current	65 A
Minimum current measurement	0.250 A
Transition current	0.500 A

Voltage measurement circuit

Consumption	< 2W , < 10VA (In, Vref)
Nominal frequency	50 / 60 Hz
Nominal voltage	3 x 127/220 ... 3 x 230/400 V ~

Electrical characteristics

Insulation voltage, circuit	4 kV RMS 50 Hz durante 1 min

Digital inputs

Input impedance	800 Ω(max.)
Type	Self-powered at + 5 Vdc (Vmax = 5.1V, Imax = 8.5 mA)
Minimum signal width	Ton ≥ 30 ms, Toff ≥ 30 ms

Standards

Electrical safety, Maximum height (m)	2000
Standards	EN 50470-1, EN 50470-3, IEC 62053-21, IEC 62053-23

User interface

LED	2 LED: kWh, 4000 imp/kW, kvarh, 4000 imp/kvarh

CEM-C21-485-DS-MID

Energy meter for DIN rail mounting

Code: Q22432.

Keyboard	2 Keys
Display type	LCD
Maximum value	999999.9 kWh

Measurement accuracy

Reactive energy measurement (kvarh)	Class 2.0 (IEC 62053-23)
Active energy measurement (kWh)	Class B (EN 50470)

Serial communication

Protocol	Modbus RTU
Technology / Type	RS-485

CEM-C
Energy meter

CODE	TYPE	Measurement Range (V)	Measurement Range (A)	Communications	Protocol	Transistor output	Digital inputs	Tariff	Certification
Direct single-phase									
Q21112.	CEM C10 212	1 x 230	5 (65) A	-	-	1	-	1	IEC
Q21114.	CEM C10 212 MID	1 x 230	5 (65) A	-	-	1	-	1	MID
Direct three-phase									
Q22411.	CEM-C21-T1	3 x 127/220...3 x 230/400	5 (65) A	-	-	1	-	1	IEC
Q22421.	CEM-C21-485-T1	3 x 127/220...3 x 230/400	5 (65) A	RS-485	Modbus/RTU	1	-	1	IEC
Q22431.	CEM-C21-485-DS	3 x 127/220...3 x 230/400	5 (65) A	RS-485	Modbus/RTU	0	1	2	IEC
Q22412.	CEM-C21-T1-MID	3 x 127/220...3 x 230/400	5 (65) A	-	-	1	-	1	MID
Direct Three-phase									
Q22332.	CEM-C21	3 x 127/220...3 x 230/400	5 (65) A	-	-	1	-	1	IEC
Direct three-phase									
Q22422.	CEM-C21-485-T1-MID	3 x 127/220...3 x 230/400	5 (65) A	RS-485	Modbus/RTU	1	-	1	MID
Q22432.	CEM-C21-485-DS-MID	3 x 127/220...3 x 230/400	5 (65) A	RS-485	Modbus/RTU	0	1	2	MID
Q22333.	CEM-C21-DS	3 x 127/220...3 x 230/400	5 (65) A	-	-	0	1	2	IEC
Indirect Three-phase									
Q23442.	CEM-C31	3 x 57/100...3 x 230/400	.../ 5 (6) A	-	-	1	-	1	IEC
Q23443.	CEM-C31-DS	3 x 57/100...3 x 230/400	.../ 5 (6) A	-	-	0	1	2	IEC
Indirect three-phase									
Q23511.	CEM-C31-T1	3 x 57/100...3 x 230/400	.../ 5 (10) A	-	-	1	-	1	IEC
Q23521.	CEM-C31-485-T1	3 x 57/100...3 x 230/400	.../ 5 (10) A	RS-485	Modbus/RTU	1	-	1	IEC
Q23531.	CEM-C31-485-DS	3 x 57/100...3 x 230/400	.../ 5 (10) A	RS-485	Modbus/RTU	0	1	2	IEC
Q23512.	CEM-C31-T1-MID	3 x 57/100...3 x 230/400	.../ 5 (10) A	-	-	1	-	1	MID
Q23522.	CEM-C31-485-T1-MID	3 x 57/100...3 x 230/400	.../ 5 (10) A	RS-485	Modbus/RTU	1	-	1	MID
Q23532.	CEM-C31-485-DS-MID	3 x 57/100...3 x 230/400	.../ 5 (10) A	RS-485	Modbus/RTU	0	1	2	MID

CEM-C10 and CEM-C21/C31 without built-in RS-485 communications can optionally communicate with CEM-M-ETH and CEM-M-RS485 modules.
Devices with absolute measurements (Abs). For 2 or 4 quadrants, see the Aditional table
Frecuency: 50/60 Hz. Parameters: V, A, kW, kVA, kWh, cos phi

Creation date: 13/03/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

CEM-C21-485-DS-MID

Energy meter for DIN rail mounting

Code: Q22432.

CEM-XXX-TI encoding table - Devices with pulse output (transistor)
CEM-XXX-DS-Devices with digital input for tariff change and impulse meter

CEM-C21-485-DS-MID

Energy meter for DIN rail mounting

Code: Q22432.

Dimensions

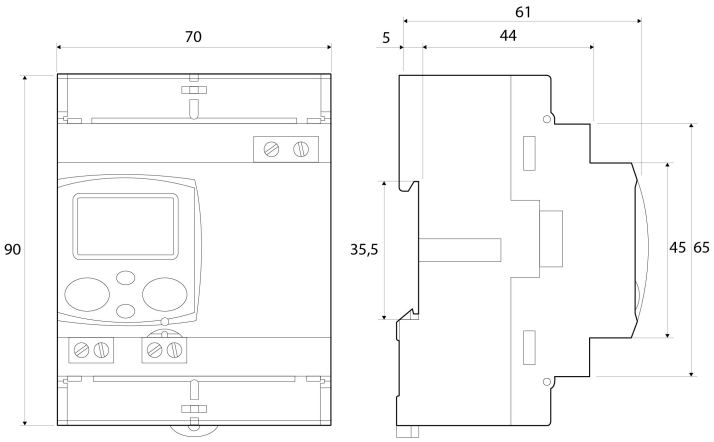

Connections

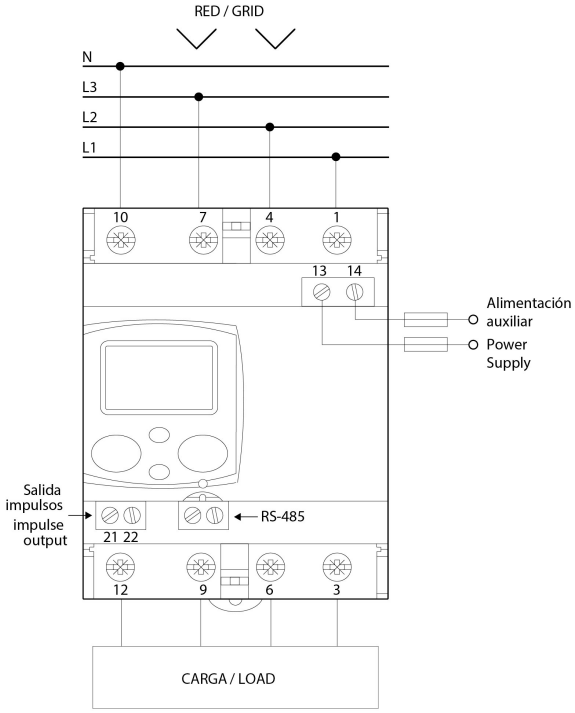

Creation date: 13/03/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.