

WGC-350x150-TB

Code: P11760.

Especificacions

AC power supply, insulation

Pulse test (kV)	3 kV
-----------------	------

Mechanical characteristics

Size (mm) width x height x depth	479 x 279 x 50.2 (mm)
Envelope	Self-extinguishing polycarbonate UL 94 V0
Fastening	Carril DIN amb accesoris
Connection type	Screw terminal (Pz type)
Weight (kg)	6,8

Environmental characteristics

Protection class	IP 20 (Terminals) IEC 60529
Relative humidity (without condensation)	5 ... 95 %
Operating temperature	-20 ... + 70 °C

Current measurement circuit

Dynamic current (Idyn)	2,5 lth
Permanent thermal current (lcth)	60 A
Thermal short-circuit current (lth)	1,8 kA / 1s
Transformation ratio	30 / 0,06 A
Maximum operating voltage (Um)	720 V

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III

Measurement accuracy

Accuracy	10 ... 15 %
----------	-------------

WGC-TB

Transformador diferencial per a relé de tipus B

CODI	TIPUS	Diàmetre interior (mm)	In (A)	Cable (m)
Només per a RGU-10B				
P11731.	WGS-20-TB	20	63	
P11751.	WGC-25-TB	25	63	
P11752.	WGC-35-TB	35	80	
P11753.	WGC-55-TB	55	160	



WGC-350x150-TB

Transformador diferencial per a Relé diferencial tipus B

Code: P11760.

CODI	TIPUS	Diàmetre interior (mm)	In (A)	Cable (m)
P11755.	WGC-80-TB	80	250	
P11756.	WGC-110 TB	110	400	
P11757.	WGC-140 TB	140	600	
P11758.	WGC-180 TB	180	800	
Només per a RGU-110B				
P11759.	WGC-220x105-TB	220 x 105	1250	-
P11760.	WGC-350x150-TB	350 x 150	2000	-
P11761.	WGC-500x200-TB	500 x 200	4000	-




WGC-350x150-TB

Transformador diferencial per a Relé diferencial tipus B

Code: P11760.

Dimensions

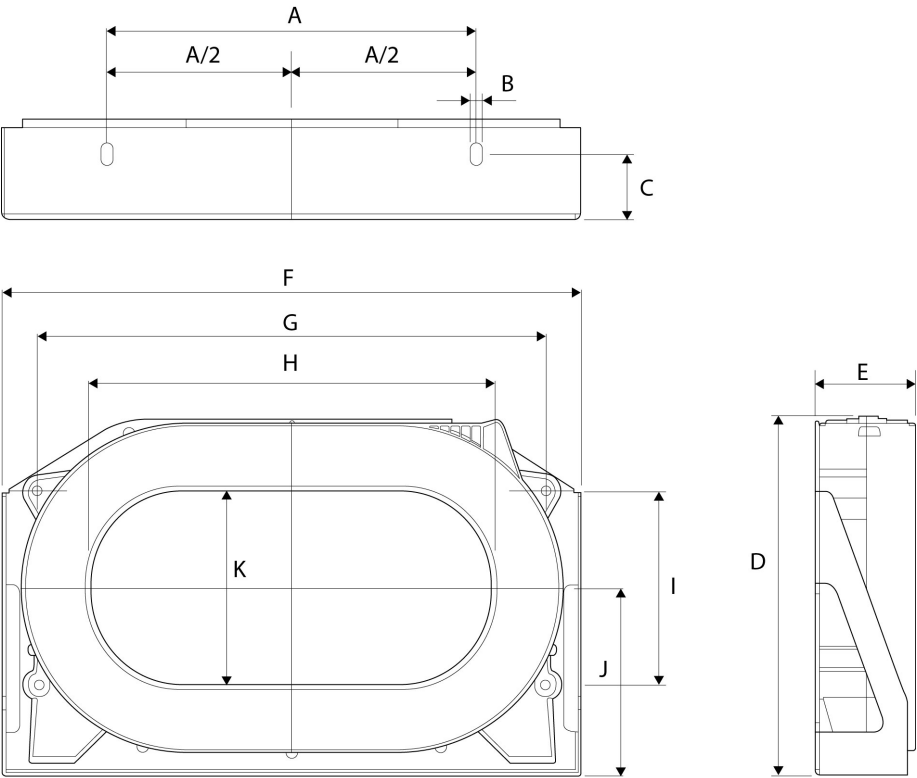

Type	A	B	C	D	E	F	G	H	I	J	K
WGC 220x105	200	7	35	195	54,2	314	275	220	105	102	105
WGC 350x150	340	7	30	279	50,2	479	430	350	165	143	150
WGC 500x200	460	7	40	306	64	614	550	500	180	155	200