



CM-GSM/3G

CM-GSM/3G, Mòdem RS-232/RS-485-GSM/3G,

Code: Q30251. DESCATALOGADO

Especificacions

Auxiliary power supply

Voltage	9 ... 24 Vdc
---------	--------------

Mechanical characteristics

Size (mm) width x height x depth	66.8 x 37.2 x 78.1 (mm)
Envelope	PC/ABS Plastic
Weight (kg)	0,25

Environmental characteristics

Protection class	IP 30
Relative humidity (without condensation)	10 ... 90 %
Storage temperature	-40 ... +85 °C
Operating temperature	-30 ... +80 °C

Standards

Electrical safety, Maximum height (m)	2000
Standards	Directive 2006/95/EC, ETSI EN 301 511 V9.0.2, ETSI EN 301 489-1 V1.8.1, ETSI EN 301 489-7 V1.3.1, IEC/EN 60950-1:2005, EN60950-1:2006+A11:2009

User interface

LED	1 LED indicación
-----	------------------

Memory

Write time	400 kB (RAM) & 1.7 MB (Flash)
------------	-------------------------------

Memòria

Tipus	SIM card interface
-------	--------------------

Ràdio comunicació

Banda	GSM/3G:Quad band, 850/900/1800/1900 MHz
-------	---

Comunicació ràdio

Tecnologia / Tipus	3G
--------------------	----

CM-GSM

Mòdems

CODI	TIPUS	Descripció
Q30250.	CM-GSM/3G	Mòdem RS-232/RS-485-GSM/3G



CM-GSM/3G

Code: Q30251.


CODI	TIPUS	Descripció
Q30251.	CM-GSM/3G	Mòdem RS-232/RS-485-GSM/3G (inclou PS + antena + cable)
Q4994E.	ANTENA	Antena amplificadora de 9 dB de guany (per a Mòdem GSM)



CM-GSM/3G

Code: Q30251.

Dimensions

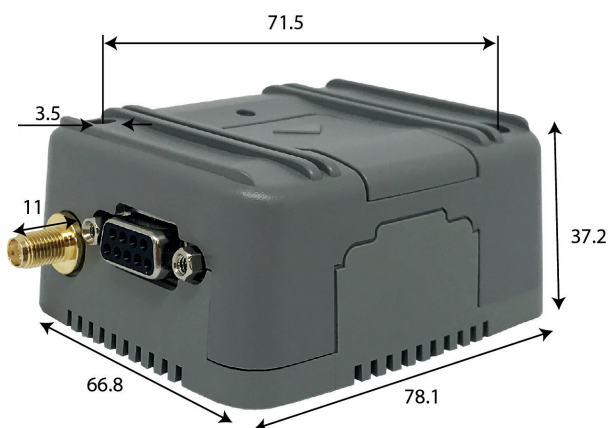

Conexions

