

eCore ActIO 22172 Energy


eCore ActIO 22172 Energy, ESP32 controller

Code: D103000026700

> Memory: 8 MB | 16 MB
> Analogue Inputs: 7
> Módules: 7
> Communications: RS232/485 | Ethernet | Wi-Fi
> Nº relays: 3 (6 A)
> Digital inputs: 2
> Power supply: 85 ... 264 V~
> CPU: ESP32 Dual-core 32-bit 240 MHz

Description

Range of controllers designed for applications with real-time needs and strict cost requirements. ESP32 Technology, FreeRTOS Operating System, Modbus RTU/TCP and MQTT built in.

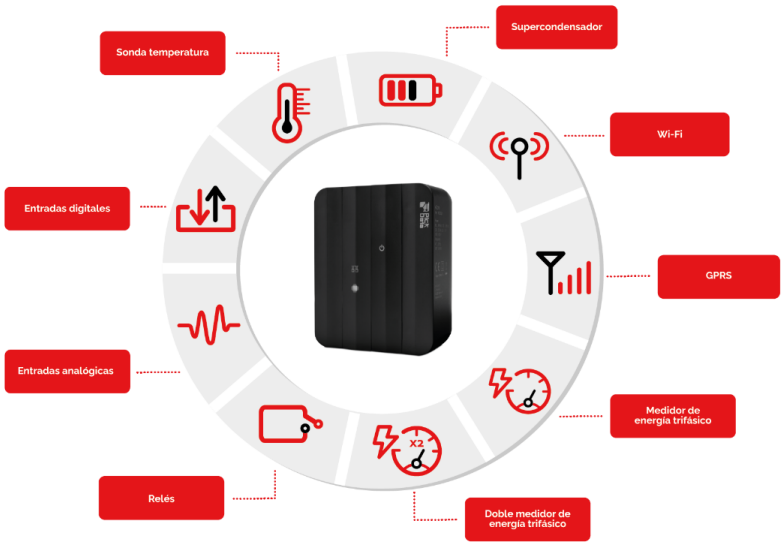

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



eCore ActIO 22172 Energy

Code: D103000026700

Specifications

AC power supply

Consumption	8,8 ... 10,5 VA
Frequency	47 ... 63 Hz
Nominal voltage	85 ... 264 V~

DC power supply

Consumption	6,4 ... 6,5 W
Nominal voltage	120 ... 300 Vdc

Electrical characteristics

Isolation level	3 kVac

Mechanical characteristics

Size (mm) width x height x depth	140 x 89 x 48 (mm)
Envelope	Polycarbonate UL94 - Self-extinguishing V2
Fastening	DIN rail 46277 (EN 50022)
Weight (kg)	1

Environmental characteristics

Protection class	IP 20
Relative humidity (without condensation)	5...95 %
Operating temperature	-20...+50 °C

Current measurement circuit

Installation category	CAT III 300 V
Nominal current (In)	... / 1A
Phase current measuring range	2...120% de In

Voltage measurement circuit

Installation category	CAT III 300 V
Voltage measuring range	5 ... 120 % Un
Nominal voltage	285V Ph-N, 480V Ph-Ph

Communication Network

Technology / Interface	Ethernet 10/100 Mbps

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Electrical safety, Contamination level/class	Double-insulated electric shock protection class II (IEC 61010)

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.



eCore ActIO 22172 Energy

Code: D103000026700

Standards	UNE EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

Electrical safety

Insulation	3 kVac

Analogue inputs

Quantity	7
Nominal range	0...10 V / 0...20 mA o 4...20 mA
Nominal input range	0...10 V / 0...20 mA or 4...20 mA

Digital inputs

Quantity	2
Type	0...24 Vdc

Digital relay outputs

Quantity	3
Type	NO
Maximum current	6 A
Maximum open contact voltage	250 Vac

Measurement accuracy

Reactive energy measurement (kvarh)	Class 2
Active energy measurement (kWh)	Class 1

Serial communication

Technology / Type	RS-232 (full-duplex) / RS-485 (half-duplex)Galvanic isolation

Wireless communication

Band	802.11 b/g/n (2.4 GHz.)
Technology / Interface	Wi-Fi

eCore ActIO Energy

ESP32 controller

CODE	TYPE	CPU	Memory	Analogue Inputs	Digital inputs	N° relays	Communications	Power supply
eCore ActIO Energy								
D103000026700	eCore ActIO 22172 Energy	ESP32 Dual-core 32-bit 240 MHz	8 MB | 16 MB	7	2	3 (6 A)	RS232/485 | Ethernet | Wi-Fi	85 ... 264 V~

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.