



## EMSC45 25A

EMSC45 25A, Ammeter

Code: M10266. DESCATALOGADO

- > Scale: 90°, P2
- > Accuracy: 1,5
- > Measurement Range (A): 25

### Description

- No need for auxiliary power supply
- Measurement in true root mean square 100 mA . 100 A
- Exchangeable scales

### Application

In alternating current applications, to control the state of the current quickly and visually.



## EMSC45 25A

Moving Iron Milliammeters and Ammeter

Code: M10266.

### Specifications

#### Mechanical characteristics

Size (mm) width x height x depth	85 x 52 x 65 (mm)
Weight (kg)	0,11

#### Environmental characteristics

Protection class	DIN rail: IP 52 (front), IP 00 (terminals)
Storage temperature	-25...+40 °C
Operating temperature	+10 ... +30 °C

#### Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

#### Current measurement circuit

Consumption	0,3 ... 1,5 VA
Sampling frequency	20...100 Hz
Allowable overload	1,2 In permanent / 5 In during 30s / 10 In during 5s / 40 In during 1s

#### Electrical characteristics

Insulation voltage, circuit	2 KV, 50 HZ <1 min entre mecanismo y caja
-----------------------------	---

#### Measurement accuracy

Accuracy	1,5 % FE
----------	----------

#### EMSC-A

Moving Iron Ammeter

CODE	TYPE	Scale	Accuracy	Measurement Range (A)
M10252.	EM45 5A	90°, P2	1,5	5
M10262.	EMSC45 5A	90°, P2	1,5	5
M10253.	EM45 10A	90°, P2	1,5	10
M10263.	EMSC45 10A	90°, P2	1,5	10
M10254.	EM45 15A	90°, P2	1,5	15
M10264.	EMSC45 15A	90°, P2	1,5	15
M10255.	EM45 20A	90°, P2	1,5	20
M10265.	EMSC45 20A	90°, P2	1,5	20
M10256.	EM45 25A	90°, P2	1,5	25



## EMSC45 25A

Moving Iron Miliammeters and Ammeter

Code: M10266.

CODE	TYPE	Scale	Accuracy	Measurement Range (A)
M10266.	EMSC45 25A	90°, P2	1,5	25
M10257.	EM45 30A	90°, P2	1,5	30
M10267.	EMSC45 30A	90°, P2	1,5	30
M10258.	EM45 40A	90°, P2	1,5	40
M10268.	EMSC45 40A	90°, P2	1,5	40
M10259.	EM45 50A	90°, P2	1,5	50
M10269.	EMSC45 50A	90°, P2	1,5	50
M1025A.	EM45 60A	90°, P2	1,5	60
M1026A.	EMSC45 60A	90°, P2	1,5	60
M10250.	EM45 ... /5A	90°, P2	1,5	.../5 A
M10260.	EMSC45 ... /5A	90°, P2	1,5	.../5 A

Exchangeable scales. See next page




## EMSC45 25A

Moving Iron Miliammeters and Ammeter

Code: M10266.

### Dimensions

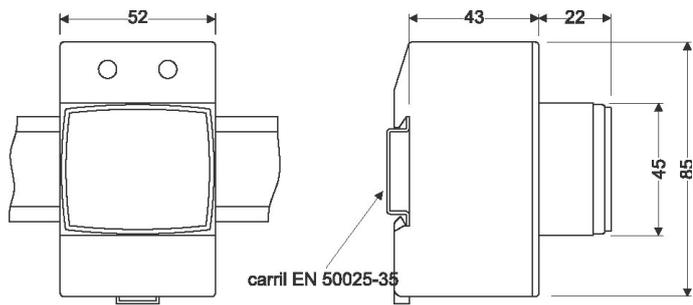

### Connections

