



## UC96 150...500V

---

UC96 150...500V, Sequence-Ind.

Code: M13731.

- > Measurement Range (V): 150...500
- > Device: UC96
- > Modules: 96x96

### Description

---

A completely electronic circuit without moving parts allows easily activation of LED

### Application

---

**UC72** and **UC96** types indicate the phase sequence type in three-phase networks.

**CUC96**, besides indicating the phase sequence type, have a relay with a free voltage switch-over contact.

The relay opens in voltage lack situation or when the phase rotation sense is wrong.



## UC96 150...500V

Code: M13731.

### Specifications

#### Mechanical characteristics

Size (mm) width x height x depth	96 x 96 x 62.9 (mm)
Fastening	Panel
Weight (kg)	0,22

#### Environmental characteristics

Protection class	Panel: IP 52 (Front), IP 00 (Terminals)
Storage temperature	-40 ... +70 °C
Operating temperature	0 ... +70 °C

#### Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	BS 89, UNE-EN 60051, IEC 144, DIN 43780, IEC 51, UNE 21318

#### Current measurement circuit

Consumption	3 mA
Sampling frequency	50 Hz

#### Voltage measurement circuit

Nominal voltage	230 V~ (optional 100-120 V~ / 380-440 V~)
Maximum permanent measurement voltage	1,2 Vn permanent rated voltage / 2 Vn during 5s

#### Measurement accuracy

Accuracy	1,5 % FE
----------	----------

#### UC / CUC

Phase sequence indicators


CODE	TYPE	Modules	Device
M13726.	UC72 100...150V	72x72	UC72
M13721.	UC72 150...500V	72x72	UC72
M13736.	UC96 100 ...150V	96x96	UC96
M13731.	UC96 150...500V	96x96	UC96
M13754.	CUC96 230V	96x96	CUC96
M13755.	CUC96 400V	96x96	CUC96



# UC96 150...500V

Code: M13731.

## Dimensions

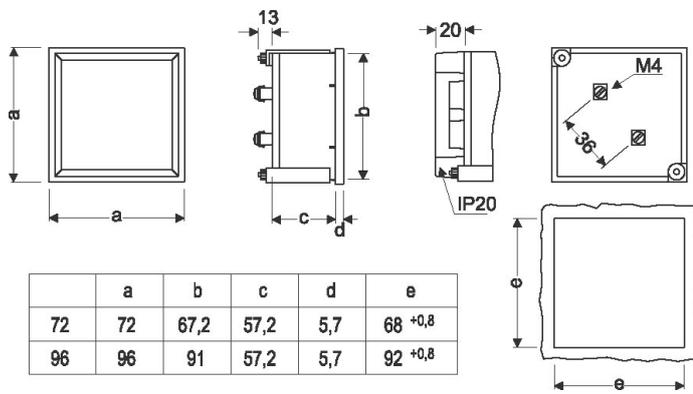

## Connections

