M-CVM-AB-Profibus

M-CVM-AB-Profibus, Expansion module

Code: M56E09.   DESCATALOGADO

> Protocol: ProfiBus
> Memory: No
> Communications: DB-9

Description

Expansion module with ProfiBus communications.

Application

Enables communication with SCADA systems, or similar, through the ProFiBus/DP protocol.

M-CVM-AB-Profibus

Expansion modules M-CVM-AB-Profibus

Code: M56E09.

Specifications

DC power supply

Consumption	2W

Mechanical characteristics

Size (mm) width x height x depth	90 x 90 x 90 (mm)
Envelope	Self-extinguishing V0 plastic
Fastening	Panel
Weight (kg)	0,14

Environmental characteristics

Protection class	IP 30
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20... +80 °C
Operating temperature	-10...+50 °C

Standards

Certifications	UL 61010-1 3rd edition, CAN/CSA-C22.2 No.61010-1 3rd. edition 2012-05
Electrical safety, Maximum height (m)	2000
Standards	IEC 61010-1 (1rd. Edition), UNE-EN 61000-6-2, UNE-EN 61000-6-4, IEC 60664-1, IEC 61010-2-030 (First Edition).

Serial communication

Protocol	LonTalk
Technology / Type	DB-9

M-CVM-AB-Profibus
Expansion modules

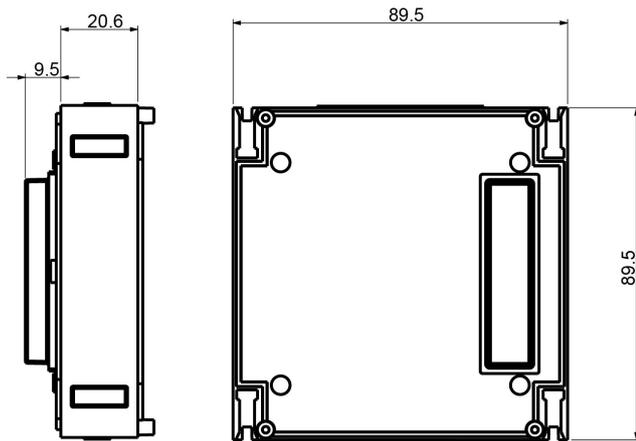| CODE	TYPE	Communications	Protocol
M56E09.	M-CVM-AB-Profibus	DB-9	ProfiBus

M-CVM-AB-Profibus

Expansion modules M-CVM-AB-Profibus

Code: M56E09.

Dimensions

20.6

9.5

89.5

89.5

Connections

Master Profibus

Red Profibus / Network Profibus

Creation date: 14/03/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content / images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

Page 3 of 3