MYeBOX-1500-4G + 3 FLEX-R80

MYeBOX-1500-4G + 3 FLEX-R80, Portable power analyzer with recording of quality events and transients

Code: M8445D0000A00 **DESCATALOGADO**

> Nr Sensors: 3 FLEX-R80
> Communications: Wi-Fi | 4G
> Transistor output: 2
> Digital inputs: 2
> No. of voltage measurement inputs: 5
> Measuring Channels: 5
> Class: Class A

Description

MYeBOX® is a range of portable analysers that can be configured from an app and/or a website to analyse and record electrical parameters, measure and record waveform transients and network quality parameters, as per the **EN 50160** standard. The information is accessible remotely from the app and/or website. **MYeBOX®** measures and records electrical parameters in single-phase, two-phase or three-phase installations (with and without a neutral).
The app/website is connected to the device to display the measured data in real time, fully configure the device, start or stop the data recording, send the recorded data to the **MYeBOX®** Cloud platform, and even access the data from the memory to view it graphically or in table form. The remote connectivity lets you analyse the measured data from anywhere. The recorded data can also be sent to a data repository for further analysis in PowerVision Plus. The device can be configured locally using the capacitive keyboard and the on-screen menu options.

MYeBOX® 150 and **MYeBOX® 1500** have the following features and functions:

- 4 voltage measurement inputs (U_1, U_2, U_3, U_n)
- 4 current measurement inputs (I_1, I_2, I_3, I_n)
- Measurement of the main electrical parameters
- Measurement of network quality parameters
- True RMS measurement (TRMS)
- Measurement of consumption and generation (4Q)
- Voltage quality event log, according to **EN 61000-4-30**
- Transients log
- Recording of the wave shape associated with the quality events and transients
- Measurement according to **EN 61000-4-30**
- Power supply is independent of the measurement
- Recording of the wave shape for each recording period
- LCD Screen
- Capacitive keypad
- Micro-USB port to download data
- Automatic detection of clamps
- Identification of phases with colours
- Compatible with clamps with EEPROM
- Recording of system events (EVA)
- NTP synchronisation
- Sending of alarms via e-mail
- Wi-Fi communications (access point/terminal)

The **MYeBOX® 1500** model also has:

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00

- 1 voltage measurement input U_{ref}
- 1 leakage current measurement input
- 2 transistor inputs to centralise impulses / tariff / state
- 2 transistor outputs for alarms
- 3G/4G communications

Application

MYeBOX can be used to:

- Prepare complete studies of an electrical installation.
- Analyse consumption, load curves, disturbances in the installation's voltage, display wave shapes, harmonics study or flicker measurement, among other options.
- Perform audits and analyses remotely.

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00

Specifications

Auxiliary battery power supply

Autonomy	2 h (without 4G), 50 min (with 4G)
Battery type	Lithium (3,7 Vc.c.)
Capacity	3700 mAh
Load temperature	0 ... 40 °C
Load time	6 h

AC power supply

Installation category	CAT II 300 V
Consumption	22...28 VA
Frequency	47...63 Hz
Nominal voltage	100...240 Vc.a.(Adaptador de alimentación de c.a.)

Powered by charger, adapter

Output voltage	9 Vc.c.
Maximum power	20 W

Environmental characteristics

Protection class	IP 30
Relative humidity (without condensation)	5...95 %
Storage temperature	-20...+60 °C
Operating temperature	-10...+50 °C

Mechanical characteristics

Envelope	Self-extinguishing V0 plastic
Weight (kg)	3

Specific technical characteristics of current sensors

Linearity	2 % (10...200 % In)
Measurement range	100/1000/10000 A

Standards

Certifications	CE
Electrical safety, Maximum height (m)	2000
Standards	Recycling European Directive 2002/96/EC, EN 61326-1, IEC 61010-1, 3rd Edition

Current measurement circuit

Installation category	CAT III 600 V
Nominal current (In)	Depending on the clamp

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00

Phase current measurement	Transformadores con salida 0,250 A ó 0,333 V
Phase current measuring range	1...200 % In
Maximum input current consumption	0,0004 VA
Maximum pulse current	3 x In A
Minimum current measurement	Depending on the clamp

Voltage measurement circuit

Installation category	CAT III 600 V (UL) / CAT IV 600 V (IEC)
Consumption	0,15 VA
Input impedance	2,4 MΩ
Frequency measuring range	42,5 ... 69 Hz
Voltage measuring range	10 ... 600 V~ (Ph-N)
Minimum measurement voltage (Vstart)	10 V ~

Battery specification

Capacity	220 mAh
Performance-guarantee	10 years
Voltage	3 Vc.c.
Type	Lithium

Electrical safety

Insulation	Double-insulated electric shock protection class II (IEC 61010-1)

User interface

Connectivity	µUSB
LED	21
Keyboard	5 keys, 2 push button

Digital inputs

Input/output insulation	2,7 kV
Quantity	2
Type	Potential-free contact
Maximum short-circuit current	5 mA
Maximum open circuit voltage	4...9 Vdc

Memory

Memory capacity	16 GB
Write time	1s, 1m, 5m, 15m, 1h, 1d
Type	FAT 32

Digital transistor outputs

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00

Quantity	2
Type	Opto MOSFET
Maximum current	90 mA
Maximum voltage	48 Vcc

Measurement accuracy

Current asymmetry (Ka)	Class A (IEC 61000-4-30)
Voltage asymmetry (Ka)	Class A (IEC 61000-4-30)
Current unbalance (Kd)	Class A (IEC 61000-4-30)
Voltage unbalance (Kd)	Class A (IEC 61000-4-30)
Frequency measurement	Class A (42.5 ... 69 Hz) (IEC 61000-4-30)
Phase current measurement	Class 0,2 (1...200 % In) (IEC 61557-12)
Reactive energy measurement (kvarh)	Class 1 (IEC 62053-23)
Power factor measurement	Class 0,5 (IEC 61557-12)
Phase voltage measurement	Class 0,2 (10...600 VPh-N ~) (IEC 61557-12)
Pinst. Flicker	3 % (IEC 61000-4-15)
Pst Flicker	5 % (0,2 ... 10Pst) (IEC 61000-4-15)

Radio communication

Band	UMTS/HSPA: 850/900/1900/2100 MHz. # GSM /GPRS /EDGE: 850/900/1800/1900 MHz.
Technology / Type	4G

Wireless communication

Band	2,4 GHz
Technology / Interface	Wi-Fi

MYeBOX

Portable power analyzer with recording of quality events and transients

CODE	TYPE	Class	Communications	No. of voltage measurement inputs	Measuring current Channels	Digital inputs	Measuring Channels	Transistor output	Nr Sensors
M840230000A00	MYeBOX-150	Class A	Wi-Fi	4	4				
M840330000A00	MYeBOX-1500	Class A	Wi-Fi | 3G	5	5	2			
M844330000A00	MYeBOX-1500-4G		Wi-Fi | 4G			2	5	2	
Portable analyzer kits with current sensors									
M8445B0000A00	MYeBOX-1500-4G + 3 FLEX-R45		Wi-Fi | 4G			2	5	2	3 FLEX-R45
M8405B0000A00	MYeBOX-1500-3 FLEX-R45	Class A	Wi-Fi | 3G	5	5	2			3 FLEX-R45
M8445C0000A00	MYeBOX-1500-4G + 4 FLEX-R45		Wi-Fi | 4G			2	5	2	4 FLEX-R45
M8445D0000A00	MYeBOX-1500-4G + 3 FLEX-R80		Wi-Fi | 4G			2	5	2	3 FLEX-R80
M8405C0000A00	MYeBOX-1500- 4 FLEX-R45	Class A	Wi-Fi | 3G	5	5	2			4 FLEX-R45

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00

CODE	TYPE	Class	Communications	No. of voltage measurement inputs	Measuring current Channels	Digital inputs	Measuring Channels	Transistor output	Nr Sensors
M8445E0000A00	MYeBOX-1500-4G + 4 FLEX-R80		Wi-Fi | 4G			2	5	2	4 FLEX-R80
M844530000A00	MYeBOX-1500-4G + 3 CPG-100		Wi-Fi | 4G			2	5	2	3 CPG-100
M8405D0000A00	MYeBOX-1500-3 FLEX-R80	Class A	Wi-Fi | 3G	5	5	2			3 FLEX-R80
M844550000A00	MYeBOX-1500-4G + 3 CPRG-500		Wi-Fi | 4G			2	5	2	3 CPRG-500
M8405E0000A00	MYeBOX-1500-4 FLEX-R80	Class A	Wi-Fi | 3G	5	5	2			4 FLEX-R80
M840530000A00	MYeBOX-1500- 3 CPG-100	Class A	Wi-Fi | 3G	5	5	2			3 CPG-100
M840550000A00	MYeBOX-1500- 3 CPRG-500	Class A	Wi-Fi | 3G	5	5	2			3 CPRG-500
M84023.	MYeBOX-150	According to Class A	Wi-Fi	4	4				
M84033.	MYeBOX-1500	According to Class A	Wi-Fi | 3G	5	5	2			
M84433.	MYeBOX-1500-4G		Wi-Fi | 4G			2	5	2	
M8404B.	MYeBOX-150+3 FLEX-R45	According to Class A	Wi-Fi	4	4				3 FLEX-R45
M8405B.	MYeBOX-1500+3 FLEX-R45	According to Class A	Wi-Fi | 3G	5	5	2			3 FLEX-R45
M8445B.	MYeBOX-1500-4G + 3 FLEX-R45		Wi-Fi | 4G			2	5	2	3 FLEX-R45
M8404C.	MYeBOX-150-4 FLEX-R45	According to Class A	Wi-Fi	4	4				4 FLEX-R45
M8405C.	MYeBOX-1500-4 FLEX-R45	According to Class A	Wi-Fi | 3G	5	5	2			4 FLEX-R45
M8445C.	MYeBOX-1500-4G + 4 FLEX-R45		Wi-Fi | 4G			2	5	2	4 FLEX-R45
M8404D.	MYeBOX-150-3 FLEX-R80	According to Class A	Wi-Fi	4	4				3 FLEX-R80
M8405D.	MYeBOX 1500+3 FLEX-R80	According to Class A	Wi-Fi | 3G	5	5	2			3 FLEX-R80
M8445D.	MYeBOX-1500-4G + 3 FLEX-R80		Wi-Fi | 4G			2	5	2	3 FLEX-R80
M8404E.	MYeBOX-150-4 FLEX-R80	According to Class A	Wi-Fi	4	4				4 FLEX-R80
M8405E.	MYeBOX-1500-4 FLEX-R80	According to Class A	Wi-Fi | 3G	5	5	2			4 FLEX-R80
M8445E.	MYeBOX-1500-4G + 4 FLEX-R80		Wi-Fi | 4G			2	5	2	4 FLEX-R80
M84043.	MYeBOX-150 + 3 CPG-100	According to Class A	Wi-Fi	4	4				3 CPG-100
M84453.	MYeBOX-1500-4G + 3 CPG-100		Wi-Fi | 4G			2	5	2	3 CPG-100
M84053.	MYeBOX-1500 + 3 CPG-100	According to Class A	Wi-Fi | 3G	5	5	2			3 CPG-100
M84045.	MYeBOX-150 + 3 CPRG-500	According to Class A	Wi-Fi	4	4				3 CPRG-500
M84455.	MYeBOX-1500-4G + 3 CPRG-500		Wi-Fi | 4G			2	5	2	3 CPRG-500
M84055.	MYeBOX-1500 + 3 CPRG-500	According to Class A	Wi-Fi | 3G	5	5	2			3 CPRG-500

Analyser with built-in SD memory and Cloud Includes voltage cables, alligator clips, USB cable, fastening strap, magnetic support, battery, power supply and carrying bag. Please contact us for other clamp or clamp length combinations

Creation date: 04/11/2026 - CIRCUTOR, SAU reserves the right to make technical changes or modify the content/images of this document without prior notice, in order to improve its reliability, functionality, design or for other reasons.
It accepts no liability for any errors, inaccuracies or possible lack of information in this document.

MYeBOX-1500-4G + 3 FLEX-R80

Portable power analyzer

Code: M8445D0000A00


Connections

MYeBOX-1500-4G + 3 FLEX-R80


Portable power analyzer

Code: M8445D0000A00

Red trifásica a 4 hilos / 4-wire three-phase network

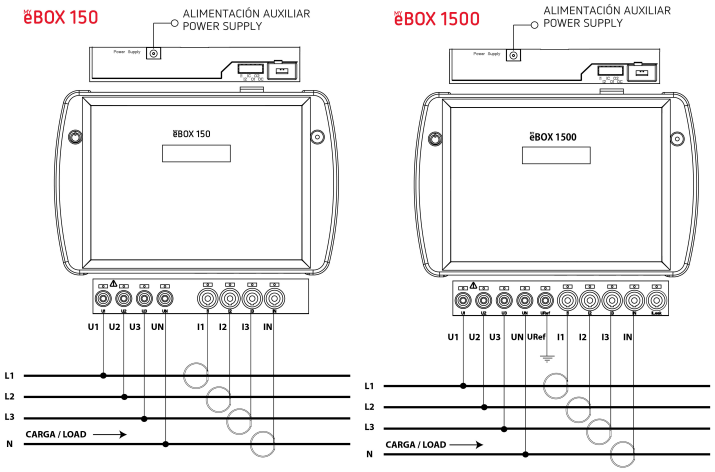

Red monofásica fase-neutro de 2 hilos
2-wire Single-phase network (Neutral)

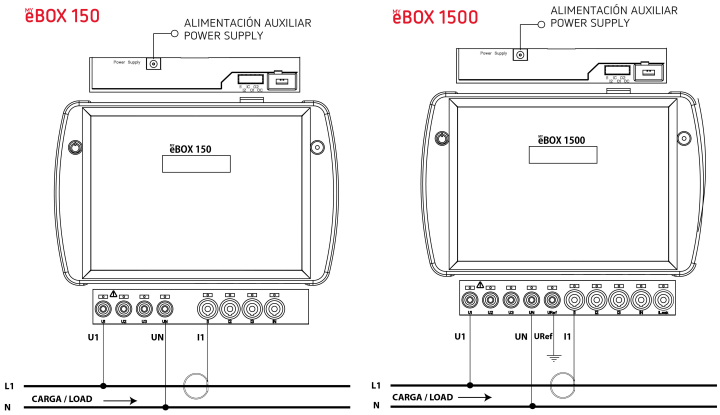

Conexión de la corriente de fuga, ILeak
Leakage current connection, ILeak

