



CM-GSM/3G

CM-GSM/3G, RS-232/RS-485 GSM/3G Modem,

Code: Q30251. DESCATALOGADO

Specifications

Auxiliary power supply

| | |
|---------|--------------|
| Voltage | 9 ... 24 Vdc |
|---------|--------------|

Mechanical characteristics

| | |
|----------------------------------|-------------------------|
| Size (mm) width x height x depth | 66.8 x 37.2 x 78.1 (mm) |
| Envelope | PC/ABS Plastic |
| Weight (kg) | 0,25 |

Environmental characteristics

| | |
|--|----------------|
| Protection class | IP 30 |
| Relative humidity (without condensation) | 10 ... 90 % |
| Storage temperature | -40 ... +85 °C |
| Operating temperature | -30 ... +80 °C |

Standards

| | |
|---------------------------------------|--|
| Electrical safety, Maximum height (m) | 2000 |
| Standards | Directive 2006/95/EC, ETSI EN 301 511 V9.0.2, ETSI EN 301 489-1 V1.8.1, ETSI EN 301 489-7 V1.3.1, IEC/EN 60950-1:2005, EN60950-1:2006+A11:2009 |

User interface

| | |
|-----|-------------------|
| LED | 1 LED indications |
|-----|-------------------|

Memory

| | |
|------------|-------------------------------|
| Write time | 400 kB (RAM) & 1.7 MB (Flash) |
| Type | SIM card interface |

Radio communication

| | |
|-------------------|---|
| Band | GSM/3G:Quad band, 850/900/1800/1900 MHz |
| Technology / Type | 3G |

CM-GSM Modems


| CODE | TYPE | Description |
|---------|-----------|--|
| Q30250. | CM-GSM/3G | RS-232/RS-485 GSM/3G Modem (includes antenna) |
| Q30251. | CM-GSM/3G | RS-232/RS-485 GSM/3G Modem (includes PS + antenna + cable) |
| Q4994E. | ANTENA | Antenna 9 dB (for GSM modem) |



CM-GSM/3G

Code: Q30251.

Dimensions

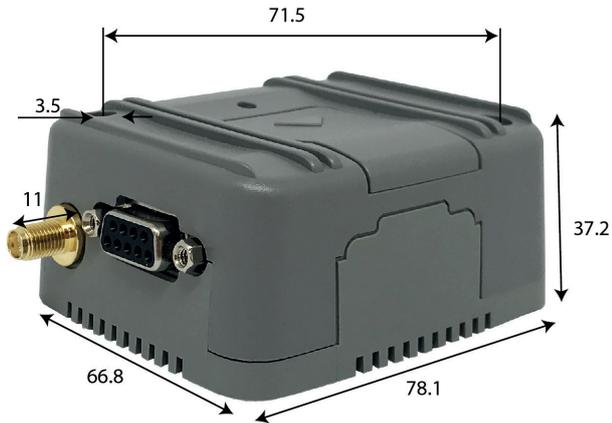

Connections

