



## 210-ES7A-0EB20

210-ES7A-0EB20, Single-phase energy meter

Code: QBM07 DESCATALOGADO

- > Tariff: 2
- > Entrada cambio tarifa: Yes
- > Certification: IEC
- > Class (Active / Reactive): B (1)
- > System: Single-phase
- > Measure: Direct
- > Measurement Range (V): 230
- > Measurement Range (A): 5 (65)
- > Quadrants: Abs.
- > Frequency (Hz): 50

### Description

The **CIRWATT B101** invoicing meter is a single-phase meter for residential use. It is IEC certified to invoice electricity to end users. It features Class-1 accuracy for active energy and up to 3 programmable tariffs. The meter has a load profile with more than 400 days of data, 12 end-of-billing periods and the option to record any tampering or fraud in a special event and service quality file. For easier reading, these meters have a backlit display that makes it easy to see the electricity consumption in places with low lighting.

### Application

Official electricity meter via on-screen verification or by data download via optical port.

The device has, depending on the version, a digital input for forced tariff changes, especially designed for installations with dual supply sources, accumulating in tariff 1 the energy from the grid and in tariff 2 the power from the second source based on the status of the digital input.

Depending on the version, the meter can be integrated with LM devices via pulse output to collect pulses, which allow the energy consumption to be centralized and sent remotely to the PowerStudio data management system.



## 210-ES7A-0EB20

CIRWATT B101 single-phase meter

Code: QBM07

### Specifications

#### AC power supply

Tolerance	80 % ... 115 % Un
Consumption	< 2 W; < 10 VA
Frequency	50 / 60 Hz
Nominal voltage	230 V

#### Mechanical characteristics

Size (mm) width x height x depth	129 x 215 x 62 (mm)
Envelope	DIN 43859

#### Environmental characteristics

Relative humidity (without condensation)	95 % max.
Storage temperature	-40 ... +85 °C
Operating temperature	-40 ... +70 °C

#### Voltage measurement circuit

Connection	Asymmetrical or Symmetrical
Consumption	< 2 W; 10 VA
Nominal frequency	50 / 60 Hz
Nominal voltage	230 V

#### Current measurement circuit

Reference current (Iref)	5 A
Maximum current	65 A
Minimum current measurement	250 mA

#### Battery specification

Performance-guarantee	> 20 years @ 30 °C
Type	Lithium

#### Optical communication interface

Protocol	IEC 62056-21 mode C
Type	Serial;bi-directional

#### User interface

Resolution of the display	up to 7 digits
Display type	LCD



## 210-ES7A-0EB20

---

CIRWATT B101 single-phase meter

Code: QBM07

### Memory

---

Memory capacity

Up to 4 tariffs, optional load profile, 9600 records for load profiles

---



## 210-ES7A-0EB20

CIRWATT B101 single-phase meter

Code: QBM07

Type	FIFO
<b>Measurement accuracy</b>	
Reactive energy measurement (kvarh)	IEC 62053-21 (Class 2)
Active energy measurement (kWh)	Class 1 - IEC 62053-21 Class B - EN 50470
<b>Features / performance</b>	
Billing closures	15

### CIRWATT B101

Single-phase energy meter

CODE	TYPE	Communications	Impulse output	Class (Active/Reactive)	Measurement Range (V)	Measurement Range (A)	Quadrants	Entrada cambio tarifa
<b>CIRWATT B101</b>								
QBM03	210-ES7A-01B20	-	1	B (1)	230	5 (65)	Abs.	0
QBM07	210-ES7A-0EB20	-	0	B (1)	230	5 (65)	Abs.	1






## 210-ES7A-0EB20

CIRWATT B101 single-phase meter

Code: QBM07

### Dimensions

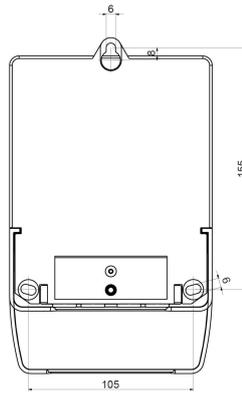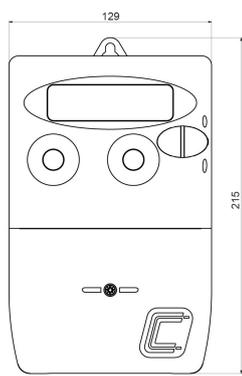

### Connections

