



# CLZ-FPT-52/3-HD

CLZ-FPT-52/3-HD, Three-phase tubular power capacitor

Code: R2H873. **CONSULTAR DISPONIBILIDAD**

- > Terminal: F
- > Frequency (Hz): 50
- > kvar (500 V): 2,7
- > kvar (525 V): 3
- > Use voltage (V): 525

### Description

**CLZ-HD** (Heavy duty) capacitor range is composed of capacitors with a tubular casing, of the dry-type, covering a wide range of power and voltage ratings, at 50 and 60 Hz. The **CLZ-HD** capacitors are designed to be installed in installations with extreme working conditions. The design, manufacturing and testing processes guarantee the production of top quality and long lasting capacitors. Those **CLZ** capacitors offer a new refrigeration technology by means of nitrogen gas\*, being a refrigerating system of high benefits, inert and non flammable.

## Application

Its application is based on compensation in installations with static or variable loads (capacitor banks). Especially designed to be installed in rough environments with the most extreme conditions due to its longer life and high temperature resistance.



# CLZ-FPT-52/3-HD

Tubular capacitor

Code: R2H873.

## Specifications

### AC power supply

|           |       |
|-----------|-------|
| Frequency | 50 Hz |
|-----------|-------|

### Electrical characteristics

|                             |                                                                                                         |
|-----------------------------|---------------------------------------------------------------------------------------------------------|
| Losses (W)                  | Dielectric: < 0,2 W / kvar Total: < 0,4 W / kvar                                                        |
| Discharge resistance        | 50 V / 1 min (0,5 - 30 kvar) 75 V / 3 min (33 - 50 kvar)                                                |
| Surge                       | 10 % 8h in 24 h 15 % up to 30 min in 24 hours 20 % up to 5 min in 24 hours 30 % up to 1 min in 24 hours |
| Tolerance C                 | -5 ... +10 %                                                                                            |
| Maximum phase current       | 400 x In                                                                                                |
| Maximum transient current   | 1,8 In                                                                                                  |
| Voltage                     | 525 V                                                                                                   |
| Insulation voltage, circuit | 3 / 12 kV                                                                                               |

### Mechanical characteristics

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Size (mm) width x height x depth | 63.5 x 140 x 63.5 (mm)                     |
| Envelope                         | Aluminum                                   |
| Thermal management               | Natural or forced depending on the cabinet |
| Fastening                        | M12 fastening screws earth conductor       |
| Weight (kg)                      | 1                                          |

### Environmental characteristics

|                                          |                                                                                          |
|------------------------------------------|------------------------------------------------------------------------------------------|
| Protection class                         | IP 20 / IP 54 with terminal cover (optional) (for models Ø 85, 100, 116 mm)              |
| Relative humidity (without condensation) | 95%                                                                                      |
| Installation, location, position.        | Vertical / Horizontal. Minimum distance between condensers 2 cm.                         |
| Operating temperature                    | Tª class D: Daily average: 45 °C, annual average: 35 °C, maximum: 65 °C, minimum: -50 °C |

### Standards

|                                       |                                                          |
|---------------------------------------|----------------------------------------------------------|
| Certifications                        | VDE 560                                                  |
| Electrical safety, Maximum height (m) | 4000                                                     |
| Standards                             | IEC 60831-1-1/2, IEC 70/7, UNE 20827, UNE 20010, BS 1650 |

### Protection

|                      |                                          |
|----------------------|------------------------------------------|
| Circuit breaker type | Dielectric regeneration Expansion system |
|----------------------|------------------------------------------|

CLZ-FP HD 50Hz  
Three-phase tubular power capacitor (Heavy Duty range)



CLZ-FPT-52/3-HD

Tubular capacitor

Code: R2H873.

| CODE                                    | TYPE               | kvar (220 V) | kvar (230 V) | Use voltage (V) | kvar (400 V) | kvar (440 V) | kvar (460 V) | kvar (500 V) | kvar (525 V) | kvar (660 V) | kvar (690 V) |
|-----------------------------------------|--------------------|--------------|--------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Faston terminal, Un = 3 x 230 V / 50 Hz |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H511.                                 | CLZ-FPT-23/1,25-HD | 1,15         | 1,25         | 230             |              |              |              |              |              |              |              |
| R2H812.                                 | CLZ-FPT-23/2,5-HD  | 2,3          | 2,5          | 230             |              |              |              |              |              |              |              |
| Terminal block, Un = 3 x 230 V / 50 Hz  |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H516.                                 | CLZ-FP-23/5-HD     | 4,6          | 5            | 230             |              |              |              |              |              |              |              |
| R2H517.                                 | CLZ-FP-23/6,25-HD  | 5,7          | 6,25         | 230             |              |              |              |              |              |              |              |
| R2H518.                                 | CLZ-FP-23/7,5-HD   | 6,8          | 7,5          | 230             |              |              |              |              |              |              |              |
| R2H51B.                                 | CLZ-FP-23/10-HD    | 9,15         | 10           | 230             |              |              |              |              |              |              |              |
| R2H51D.                                 | CLZ-FP-23/12,5-HD  | 11,4         | 12,5         | 230             |              |              |              |              |              |              |              |
| R2H51E.                                 | CLZ-FP-23/15-HD    | 13,75        | 15           | 230             |              |              |              |              |              |              |              |
| Faston terminal, Un = 3 x 440 V / 50 Hz |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H541.                                 | CLZ-FPT-44/1,25-HD |              |              | 400   440       | 1            | 1,25         |              |              |              |              |              |
| R2H542.                                 | CLZ-FPT-44/2,5-HD  |              |              | 400   440       | 2            | 2,5          |              |              |              |              |              |
| R2H543.                                 | CLZ-FPT-44/3-HD    |              |              | 400   440       | 2,5          | 3            |              |              |              |              |              |
| R2H544.                                 | CLZ-FPT-44/3,75-HD |              |              | 400   440       | 3            | 3,75         |              |              |              |              |              |
| R2H546.                                 | CLZ-FPT-44/5-HD    |              |              | 400   440       | 4            | 5            |              |              |              |              |              |
| R2H547.                                 | CLZ-FPT-44/6,25-HD |              |              | 400   440       | 5            | 6,25         |              |              |              |              |              |
| R2H848.                                 | CLZ-FPT-44/7,5-HD  |              |              | 400   440       | 6,25         | 7,5          |              |              |              |              |              |
| Terminal block, Un = 3 x 440 V / 50 Hz  |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H54B.                                 | CLZ-FP-44/10-HD    |              |              | 400   440       | 8            | 10           |              |              |              |              |              |
| R2H54D.                                 | CLZ-FP-44/12,5-HD  |              |              | 400   440       | 10           | 12,5         |              |              |              |              |              |
| R2H54E.                                 | CLZ-FP-44/15-HD    |              |              | 400   440       | 12,5         | 15           |              |              |              |              |              |
| R2H54G.                                 | CLZ-FP-44/18,2-HD  |              |              | 400   440       | 15           | 18,2         |              |              |              |              |              |
| R2H54J.                                 | CLZ-FP-44/20-HD    |              |              | 400   440       | 16           | 20           |              |              |              |              |              |
| R2H54L.                                 | CLZ-FP-44/25-HD    |              |              | 400   440       | 20           | 25           |              |              |              |              |              |
| R2H54N.                                 | CLZ-FP-44/30-HD    |              |              | 400   440       | 25           | 30           |              |              |              |              |              |
| R2H54R.                                 | CLZ-FP-44/40-HD    |              |              | 400   440       | 32           | 40           |              |              |              |              |              |
| R2H54S.                                 | CLZ-FP-44/50-HD    |              |              | 400   440       | 40           | 50           |              |              |              |              |              |
| Faston terminal, Un = 3 x 460 V / 50 Hz |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H857.                                 | CLZ-FPT-46/6,25-HD |              |              | 460             |              | 5,7          | 6,25         |              |              |              |              |
| Terminal block, Un = 3 x 460 V / 50 Hz  |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H55D.                                 | CLZ-FP-46/12,5-HD  |              |              | 460             |              | 11,4         | 12,5         |              |              |              |              |
| R2H557.                                 | CLZ-FP-46/6,25-HD  |              |              | 460             |              | 11,4         | 12,5         |              |              |              |              |
| R2H55E.                                 | CLZ-FP-46/15-HD    |              |              | 460             |              | 13,7         | 15           |              |              |              |              |
| R2H55H.                                 | CLZ-FP-46/19-HD    |              |              | 460             |              | 17,4         | 19           |              |              |              |              |
| R2H55L.                                 | CLZ-FP-46/25-HD    |              |              | 460             |              | 22,9         | 25           |              |              |              |              |
| R2H55N.                                 | CLZ-FP-46/30-HD    |              |              | 460             |              | 27,4         | 30           |              |              |              |              |
| R2H55P.                                 | CLZ-FP-46/33.3-HD  |              |              | 460             |              | 30,5         | 33,3         |              |              |              |              |



## CLZ-FPT-52/3-HD

Tubular capacitor

Code: R2H873.

| CODE                                           | TYPE               | kvar (220 V) | kvar (230 V) | Use voltage (V) | kvar (400 V) | kvar (440 V) | kvar (460 V) | kvar (500 V) | kvar (525 V) | kvar (660 V) | kvar (690 V) |
|------------------------------------------------|--------------------|--------------|--------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| R2H578.                                        | CLZ-FP-52/7,5-HD   |              |              |                 |              |              |              |              |              |              |              |
| <b>Faston terminal, Un = 3 x 525 V / 50 Hz</b> |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H872.                                        | CLZ-FPT-52/2,5-HD  |              |              | 525             |              |              |              | 2,3          | 2,5          |              |              |
| R2H873.                                        | CLZ-FPT-52/3-HD    |              |              | 525             |              |              |              | 2,7          | 3            |              |              |
| R2H875.                                        | CLZ-FPT-52/4-HD    |              |              | 525             |              |              |              | 3,6          | 4            |              |              |
| R2H876.                                        | CLZ-FPT-52/5-HD    |              |              | 525             |              |              |              | 4,5          | 5            |              |              |
| R2H877.                                        | CLZ-FPT-52/6,25-HD |              |              | 525             |              |              |              | 5,7          | 6,25         |              |              |
| R2H878.                                        | CLZ-FPT-52/7,5-HD  |              |              | 525             |              |              |              | 6,8          | 7,5          |              |              |
| <b>Terminal block, Un = 3 x 525 V / 50 Hz</b>  |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H579.                                        | CLZ-FP-52/8-HD     |              |              | 525             |              |              |              | 7,25         | 8            |              |              |
| R2H576.                                        | CLZ-FP-52/6.25-HD  |              |              | 525             |              |              |              | 7,25         | 8            |              |              |
| R2H57B.                                        | CLZ-FP-52/10-HD    |              |              | 525             |              |              |              | 9,1          | 10           |              |              |
| R2H57D.                                        | CLZ-FP-52/12,5-HD  |              |              | 525             |              |              |              | 11,3         | 12,5         |              |              |
| R2H57E.                                        | CLZ-FP-52/15-HD    |              |              | 525             |              |              |              | 13,6         | 15           |              |              |
| R2H57J.                                        | CLZ-FP-52/20-HD    |              |              | 525             |              |              |              | 18,15        | 20           |              |              |
| R2H57L.                                        | CLZ-FP-52/25-HD    |              |              | 525             |              |              |              | 22,7         | 25           |              |              |
| R2H57N.                                        | CLZ-FP-52/30-HD    |              |              | 525             |              |              |              | 27,2         | 30           |              |              |
| R2H57P.                                        | CLZ-FP-52/37,5-HD  |              |              | 525             |              |              |              | 34           | 37,5         |              |              |
| R2H57R.                                        | CLZ-FP-52/40-HD    |              |              | 525             |              |              |              | 36,3         | 40           |              |              |
| R2H57S.                                        | CLZ-FP-52/50-HD    |              |              | 525             |              |              |              | 45,4         | 50           |              |              |
| <b>Faston terminal, Un = 3 x 690 V / 50 Hz</b> |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H892.                                        | CLZ-FPT-69/2,5-HD  |              |              | 690             |              |              |              |              |              | 2,3          | 2,5          |
| R2H896.                                        | CLZ-FPT-69/5-HD    |              |              | 690             |              |              |              |              |              | 4,6          | 5            |
| <b>Terminal block, Un = 3 x 690 V / 50 Hz</b>  |                    |              |              |                 |              |              |              |              |              |              |              |
| R2H598.                                        | CLZ-FP-69/7,5-HD   |              |              | 690             |              |              |              |              |              | 6,9          | 7,5          |
| R2H59B.                                        | CLZ-FP-69/10-HD    |              |              | 690             |              |              |              |              |              | 9,15         | 10           |
| R2H59D.                                        | CLZ-FP-69/12,5-HD  |              |              | 690             |              |              |              |              |              | 11,4         | 12,5         |
| R2H59E.                                        | CLZ-FP-69/15-HD    |              |              | 690             |              |              |              |              |              | 13,7         | 15           |
| R2H59J.                                        | CLZ-FP-69/20-HD    |              |              | 690             |              |              |              |              |              | 18,3         | 20           |
| R2H59L.                                        | CLZ-FP-69/25-HD    |              |              | 690             |              |              |              |              |              | 22,9         | 25           |
| R2H59N.                                        | CLZ-FP-69/30-HD    |              |              | 690             |              |              |              |              |              | 27,5         | 30           |
| R2H59R.                                        | CLZ-FP-69/40-HD    |              |              | 690             |              |              |              |              |              | 36,6         | 40           |
| R2H59S.                                        | CLZ-FP-69/50-HD    |              |              | 690             |              |              |              |              |              | 45,75        | 50           |

All models are of the inert gas type, except for those with a 63.5 mm diameter and 136x355 mm size. The dimensions (dxh) are shown for the tube only. Please consult the dimensions drawing at the end of this section for more information about the actual dimensions. Terminal: maximum cross-section of type A cables: 16 mm<sup>2</sup>, type B: 25 mm<sup>2</sup>, type C: 35 mm<sup>2</sup>, F: Faston 6.3x0.8 mm and 12 A maximum current




CLZ-FPT-52/3-HD

Tubular capacitor

Code: R2H873.

Dimensions

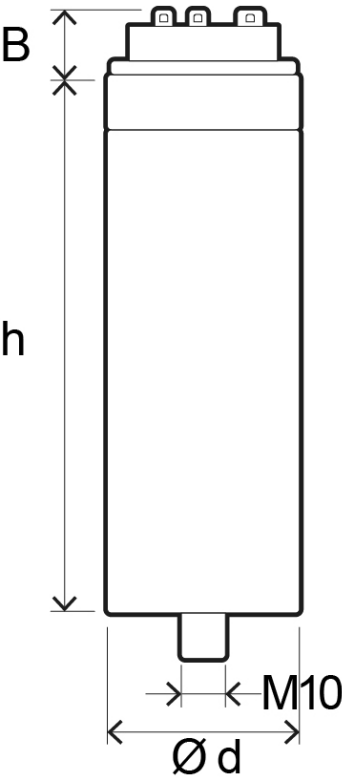

| mm       | d Ø  | h   | B  | A Ø  |
|----------|------|-----|----|------|
| 63,5x98  | 63,5 | 98  | 13 | 68,5 |
| 63,5x127 | 63,5 | 127 | 13 | 68,5 |
| 63,5x175 | 63,5 | 175 | 13 | 68,5 |
| 63,5x202 | 63,5 | 202 | 13 | 68,5 |